

# ECONOMY HIGH OUTPUT STRIP

CATALOG NO.	LAMPS	BALLAST	POWER FACTOR	LENGTH	WIDTH	DEPTH	PCS/ CTN	UNIT WT.
4148 S-HO	1-60W	800 MA	High	48	4-5/8	4-3/4	1	14
4248 S-HO	2-60W	800 MA	High	48	4-5/8	4-3/4	1	14
4172 S-HO	1-85W	800 MA	High	72	4-5/8	4-3/4	1	17
4272 S-HO	2-85W	800 MA	High	72	4-5/8	4-3/4	1	17
4196 S-HO	1-110W	800 MA	High	96	4-5/8	4-3/4	1	20
4296 S-HO	2-95W	800 MA	High	96	4-5/8	4-3/4	1	20

## TANDEM UNIT - 16 FOOT




4196-2 HO	2-95W	800 MA	High	192	4-5/8	4-3/4	1	32
-----------	-------	--------	------	-----	-------	-------	---	----

- ⓓ Housing and ends are die-formed steel, finished with baked white polyester powder coating.
- ⓓ Snap-on channel covers and ends do not require tools for installation and maintenance.
- ⓓ Combination end plate - channel connector furnished.
- ⓓ High output model--800 mA.
- ⓓ Optional asymmetrical reflectors available.

All H & H Lighting Fixtures are completely wired for 118 volts 60 cycle A.C. operation. Ready for installation. All fixtures bear the I.B.E.W., A. F. of L. and Underwriters Laboratories, Inc. labels.



# ECONOMY HIGH OUTPUT

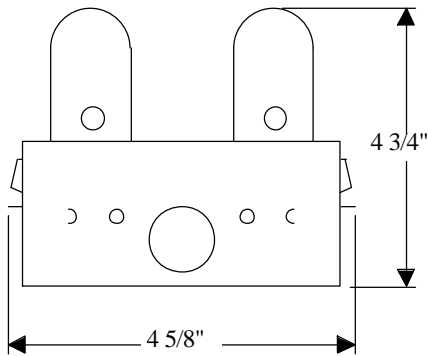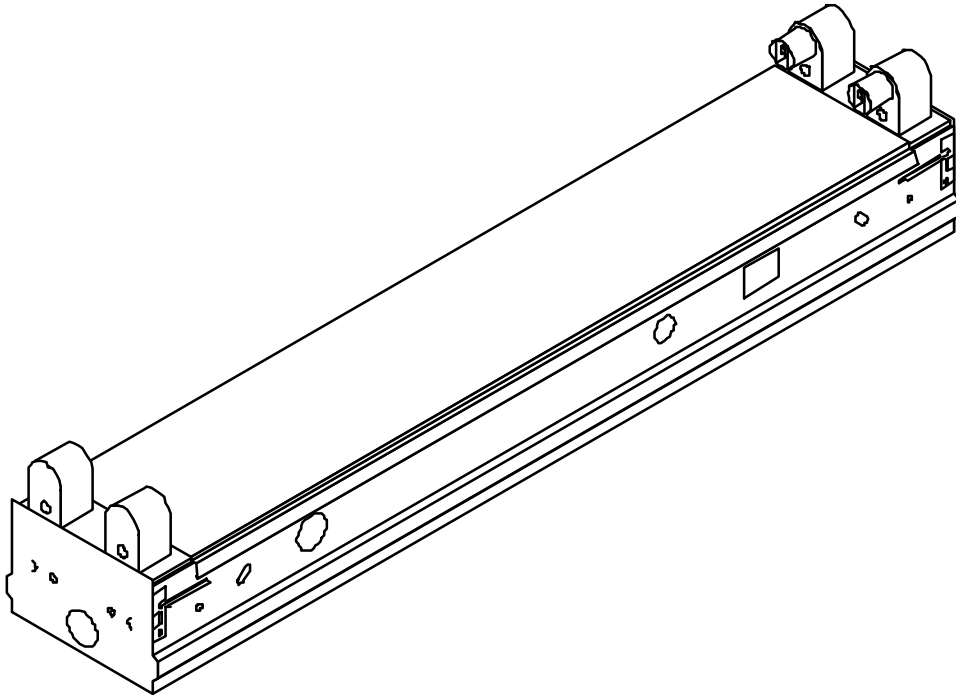

**MOUNTING** - Complete with knockouts for surface mounting or pendant mounting, individually or in continuous rows. Pendant mounting accessories available on specification. Conduit knockouts are supplied on ends and back.

**ELECTRICAL** - Furnished standard with UL listed ballasts, for 120 Volt 60 Hz A.C. operation. Other voltages and accessories available. Fixtures bear the I.B.E.W., A.F. of L., and Underwriters' Laboratories, Inc. labels.

**APPLICATION** - All industrial fixtures are designed for quick, easy installation, either hanging or flush, individually or in continuous rows.

**CONSTRUCTION** - Wireway and ends die-formed of code gauge steel, finished in automatic bonderizing, rust preventative process, with high reflectivity powder coated baked white enamel. Reflector is removable for easy access to electrical components.